



CERTIFIED TO CSA STD 22.2 NO.46 CONFORMS TO UL STD 2021

RADIUS ARCHITECTURAL RADIANT HEATER









Solaira[°]

DRIVEN BY ENGINEERING, DESIGN AND PERFORMANCE. LEARN MORE AT WWW.SOLAIRAHEATERS.COM

Solaira

RADIUS



Tech Specs

MODEL	POWER (WATTS)	BTU's	VOLTS	AMPS	WEIGHT
GRAD30208-B GRAD30208-W**	3000W	10,200	208	14.4A	
GRAD30240-B GRAD30240-W**	3000W	10,200	240	12.5A	
GRAD30208-B GRAD30208-W**	4500W	15,350	208	21.6A	32LBS / 14.5KG
GRAD30240-B GRAD30240-W**	4500W	15,350	240	18.8A	

* -W INDICATES WHITE, -B INDICATES BLACK ** WHITE HEATERS AVAILABLE BY SPECIAL ORDER ONLY





125 Traders Blvd East, Mississauga, ON L4Z 2H3 Canada Tel. Inquires: 1-866-321-8373 Canadian Customers: 905-568-7655 International Customers: +001-905-568-7655

Solaira


RADIUS

Heater Dimensions

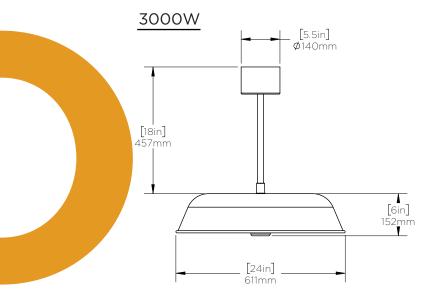





Heater Clearances




4500W CLEARANCES



DISTANCES BETWEEN HEATERS






Coverage Areas

0

Solaira

MODEL	Mounting Height	DIAMETER	HEAT DENSITY WATTS/ SQUARE FEET
GRAD30208 GRAD30240	8' (2.4m)	8' (2.4m)	20 W/SF ²
GRAD45208 GRAD45240	8' (2.4m)	10' (3.1m)	20 W/SF
	10' (3.1m)	12' (4.3m)	15 W/SF



HEATSPEC

Solaira's HEAT SPEC tool deliveres elevated heater coverage visualizations allowing you to see heating areas and estimate heat rises in your space before you purchase.

CONTACT YOUR SALES REP FOR A HEATSPEC LAYOUT TODAY

DRIVEN BY ENGINEERING, DESIGN AND PERFORMANCE.

LEARN MORE AT WWW.SOLAIRAHEATERS.COM REV A1: 2024-10-02

125 Traders Blvd East, Mississauga, ON L4Z 2H3 Canada Tel. Inquires: 1-866-321-8373 Canadian Customers: 905-568-7655 International Customers: +001-905-568-7655